

ER 309L

Stainless Steel WIRE/GTAW


Standards

EN/ISO-Standard - 14343-A
EN/ISO-Classification - W 23 12 L

AWS-Standard - A5.9
AWS-Classification - ER 309L

Features and Applications

- Austenitic stainless steel wire that has a low carbon content, which reduces the possibilities of intergranular carbide precipitation, while increasing the resistance to intergranular corrosion without the use of stabilisers such as niobium or titanium.
- Good performance under carburising atmospheres.
- High temperature oxidation and corrosion resistance.
- ER 309L can be used to weld dissimilar steels and buffer layers.
- Ideal for joining and overlay of stainless steels of similar composition, such as AISI 309 castings, and for joining of 3Cr12.
- Typically used on applications in industrial furnaces and boiler parts, annealing chambers, heat exchangers, fused salt treatment installations etc.
- **Test Certificates can be found online @wilkinsonstar247.com**

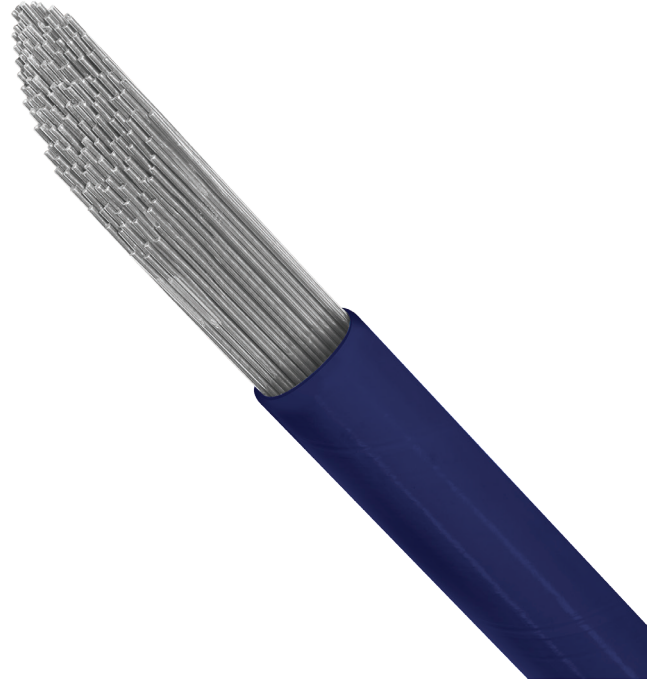

Typical Base Materials

All 300 series austenitic stainless steel, 3Cr12, mild steels (cladding)*

* Illustrative, not exhaustive list

Welding Positions

EN ISO 6947 - PA, PB, PC, PD, PE, PF, PG

Shielding Gases

EN ISO 14175 - TIG: I1 (Argon)

Polarity

DC (-)

Mechanical Properties

Tensile Strength (N/mm ²)	Yield Strength (N/mm ²)	Elongation (%)	Impact Strength (J)
≥510	≥320	≥25	≥50

Mechanical properties are approximate and may vary based on the heat, shielding gas, welding parameters and other factors.

Chemical Composition % (Typical)

C %	Mn %	Si %	S %	P %	Ni %	Cr %	Mo %	Cu %
0.019	1.82	0.34	0.010	0.025	12.70	23.35	0.060	0.07

Packaging Data

Part No.	Diameter Ø (mm)	Package Length (mm)	Package Weight (Kg)	Package Type
6011100548	1.00	1000	5	Cardboard Tube
6011100549	1.20	1000	5	Cardboard Tube
6011100333	1.60	1000	5	Cardboard Tube
6011100335	2.40	1000	5	Cardboard Tube
6011100396	3.20	1000	5	Cardboard Tube

Liability: Whilst all reasonable efforts have been made to ensure the accuracy of the information contained, this information is subject to change without notice and can be only considered as suitable for general guidance.

